

ARM STRONG Group Company

ARM STITCH™


FIBC/BIG BAG SEWING MACHINE



AS - 606 DDR

TECHNICAL DETAIL:

DOUBLE NEEDLE, PLAIN FEED, FOUR THREAD, DOUBLE LOCKED HEAVY DUTY CHAIN STITCH SEWING MACHINE. PRODUCES TWO PARALLEL SEAMS IN A DISTANCE 7.2 mm.

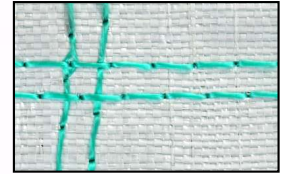

AS-606 DDR

APPLICATION:

For Seaming & Hemming Of Light To Heavy Weight Fabrics. Made From Woven Polypropylene, Suitable For Omega Sewing On Container Bags (Filler Cord from Top & Below Can Be Stitched For Sealing Needle Punctures).


AS - 606 UDDR

TECHNICAL DETAIL:

DOUBLE NEEDLE, FOUR THREAD, DOUBLE LOCKED HEAVY DUTY CHAIN STITCH SEWING MACHINE WITH LOWERFEED & ALTERNATING UPPERFEED.

APPLICATION:

For Even Matched Side Seams On Heavy Weight Fabrics, Applicable For All Seams On Container Bags. Side Seams, Inserting Top Cover, Attaching Filling & Discharging Tubes With Filler Cords From The Top & From Below For Sealing The Left Side Needle Punctures.

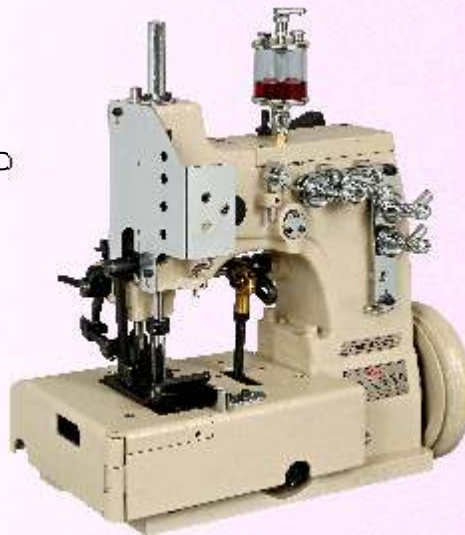

AS-606 UDDR

TECHNICAL PARAMETERS:

MODEL	MAX. SPEED (R.P.M.) APPROX.	WORKING SPEED (R.P.M.) APPROX.	STITCH RANGE (100 MM)	DISTANCE BETWEEN TWO NEEDLES	SEWING CAPACITY (MM)	NEEDLE SIZE	NO. OF NEEDLES	NO. OF THREAD	STITCHING THREAD TYPE	LUBRI-CATION	MOTOR
AS 606 DDR	1800	1600 depends on Sewing Material	6 - 13 * Adjus-table	10 mm	Up to 12 mm	DR x 2 # 28 (Organ)	Two	Four	PP Multi Filament, Fabricated Yarn	Semi Auto-matic	1 H.P., 1 or 3 phase 1425-2850 RPM
AS 606 UDDR	1800	1600 depends on Sewing Material	6 - 13 * Adjus-table	10 mm	Up to 15 mm	UY9848GS 29/120 (Schmetz)	Two	Four	Multi Filament, Fabricated Yarn	Semi Auto-matic	1 H.P., 1 or 3 phase 1425-2850 RPM

Mfg. By :



Ginza
MACHINERY MFG. CO.

Plot No. 1106/1107, Phase III, D-Road, G.I.D.C., Vatwa, Ahmedabad - 382 445. GUJARAT-INDIA

Phone : +91-79-2583 4255, 2583 0432 Fax : +91-79-2583 2255

E-mail : daspanchal@armstitch.com • pritesh@armstitch.com • pratik@armstitch.com Website : www.armstitch.com